


PV Inverter Accessories

King Logger

Features

- Color Graphic display
- Touch penal operation
- Real-time clock
- Automatic backup to prevent data loss
- RS232, RS485 and multi-interface
- RJ45 Ethernet socket
- Universal AC power input
- Wall mounted or stanalone with frame supporter
- Alarm notification by SMS and MAIL
- CF card storage, user accessible
- Multiple language extended (English)
- Data logging data for more than 3 years if a 512Mb storage media is used

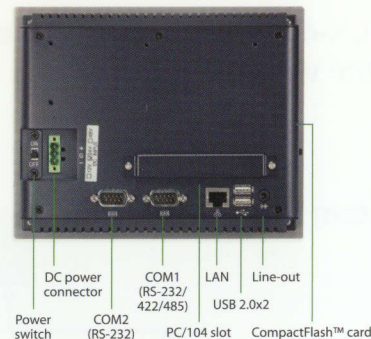

Description

The King Logger for PV inverters. The name of the data logger is "King Logger". The naming "King" means powerful and friendly to operate the device. We intended to develop a product that users do not have to read the user manual for basic operation.

Solar Charger SPEC.

FEATURES

- > Optimal MPPT Tracking method.
- > Over voltage\current protection.
- > High converting efficiency>95%.
- > Auto sensing battery voltage.
- > The solar charger parallel operated in good current sharing performance.



Model	MPPT Solar charger
Battery unit (12V/per)	4x
Rated Voltage	48Vdc
Rated charge current	15Amp
Input voltage range	50Vdc~110Vdc
Overload protection	16A
Over charge protection	57.5V
Over charge recovery	53.5V
Operation temperature	-20° C~40° C
Storage Temperature	-25° C ~ 70° C
Ambient Operation	5000 meters max. elevation, 0-95% humidity non-condensing
Audible Noise	<40dBA (1 meter from surface)
Storage Condition	16,000 meters max.
Protection class	IP21
Terminal size (single wire)	12AWG
Mechanical specification	
Dimension	212.4 x 139.6 x 61.6 mm
Weight	1.45kg